



MFF

High-Precision Cutter for Finishing Applications



Innovative Finishing Technology with Excellent Efficiency

Enhanced Cutter Design for a Better Finishing Solution

Molded Wiper Insert Design

High Feed Rates ($f = \text{Max } 0.197 \text{ ipt}$) and High-Quality Surface Finish ($0.8 \mu\text{m Ra}$)

Adjustable Cutting Edge Height for Improved Usability



MFF

High-Precision Cutter for Finishing Applications

Cutter Body Design Provides Excellent Reliability
Molded Wiper Inserts Increase Machining Efficiency

1 Innovative Solutions for Finish Machining

Designed with a unique insert combination of semi-finishing and finishing, the MFF drastically improves productivity by reducing finish quality issues.



Semi-finishing Insert
To flatten rugged surfaces

Finishing Insert
Provides excellent surface finish
Adjustable cutting edge and a single insert eliminates runout

SOLUTION



- Increase feed to $f = 0.197$ ipt
- Achieved $0.8 \mu\text{m Ra}$ surface finish
- No grinding required
- Achieved $5 \mu\text{m}$ flatness

The above is the result of a field test. Actual results will depend on machining environment, workpiece rigidity, machine, etc. For more details, see case studies on page 4 and 5.

MFF Machining Solutions

Can be used on a wide variety of parts and workpieces

Parts	Workpieces	Industries
Plate / Frame / Case Cylinder Pump / Rail Turbine Housing Casing / Mold Base	SS400 / NO.45 / 80-60-03 Cast Iron Mold Steel Carburized and Hardened Steel (60 HRC)	Industrial Machining Machine Tools Shipbuilding / Automotive Construction Machinery Molds



2 Molded Wiper Insert for High-Quality Surface Finish

Utilizes Kyocera's unique molded insert technology for high feed rates and excellent surface finish



Low cutting force with special edge preparation

Micro-honing
Good sharpness

Wiper edge

Large S-curve shape developed for higher feed rates

Edge Temperature Simulation Comparison (Internal Evaluation)

MFF

Conventional Tool

After 2 sec machining

MEGACOAT NANO Cermet **PV60M**

For high-speed machining
Recommended Vc = ~ 1,150 sfm


High-quality surface finish

Molded **TT** Chipbreaker

Reduces chip clogging
High feed machining

Comprehensive Machining Solutions From Roughing to Finish Machining Improvements (Internal Evaluation)

Combine with Kyocera's MFH high feed cutter to improve quality and efficiency

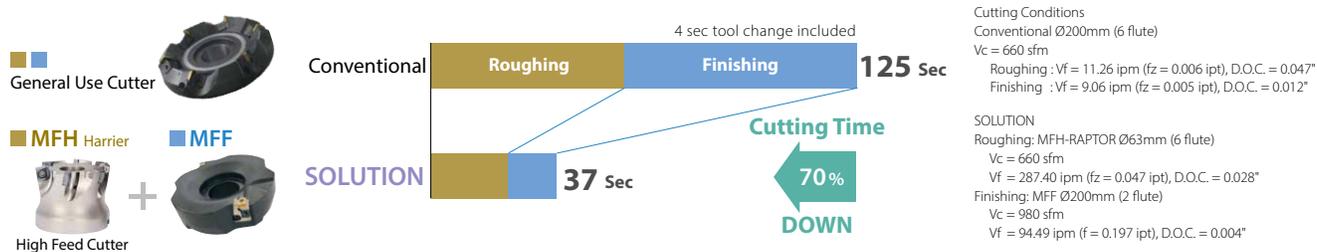

Surface Finish Quality after Machining

The MFF SOLUTION



Conventional Machining




Take advantage of innovative finishing solutions with the MFF

User Evaluations

SOLUTION 1

1.7 times increase in efficiency at $f = 0.197$ ipt with a $0.8 \mu\text{m Ra}$ surface finish

Plate (SS400)

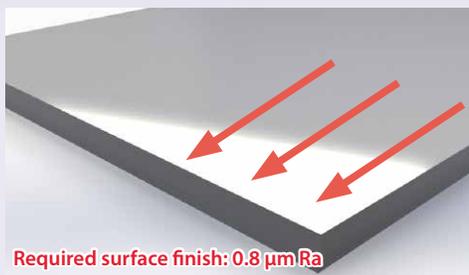

SOLUTION MFF


Ø200mm 2 flute



1.7 times Machining Efficiency

$V_f = 8,530$ sfm

$V_c = 1,080$ sfm, $f = 0.169$ ipt, D.O.C. = $0.004''$, Dry



Conventional Competitor A
Ø200mm 2 flute

$V_f = 4,920$ sfm


$V_c = 720$ sfm, $f = 0.169$ ipt, D.O.C. = $0.004''$, Dry

The conventional cutter was not able to feed faster than $f = 0.169$ ipt as surface finish deteriorated. The MFF showed good surface finish of $0.8 \mu\text{m Ra}$ or less even at $f = 0.197$ ipt. Increasing the cutting speed increased machining efficiency by 1.7 times.

SOLUTION 2

Surface finish $0.5 \mu\text{m Ra}$. No grinding required (Fewer Processes)

Valve (65-45-12)

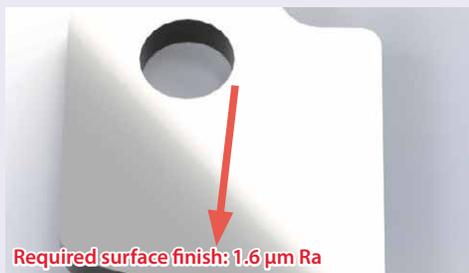

SOLUTION MFF

Ø160mm 2 flute



No grinding required

127 sec

$V_c = 980$ sfm, $V_f = 9.84$ ipm ($f = 0.016$ ipt) D.O.C. = $0.004''$, Wet



Conventional Competitor B
Ø200mm 10 flute

Machining 32 sec + Grinding 10 min

$V_c = 980$ sfm, $V_f = 31.50$ ipm ($f = 0.063$ ipt) D.O.C. = $0.004''$, Wet

Conventional cutter showed cloudy finished surface, MFF provided $0.5 \mu\text{m Ra}$ with a glossy finish. Reduced grinding process and cycle time by 80%.



SOLUTION 3

Improved flatness and machining efficiency tripled in interrupted mold steel

Mold (H13 Equivalent)



SOLUTION

MFF

Ø200mm 2 flute



Machining Efficiency x 3

Vf = 14.96 ipm 6 Pass

Vc = 390 sfm, f = 0.079 ipt, D.O.C. = 0.002", Dry



Conventional

Competitor C

Ø125mm 5 flute

Vf = 8.27 ipm 10 Pass

Vc = 390 sfm, f = 0.026 ipt, D.O.C. = 0.002", Dry

The MFF left a good finished surface with no gaps among tool path seams. Larger cutter diameter reduced the number of passes to six and improved productivity. Desirable chip shape and size were achieved.

SOLUTION 4

Flatness of 5 μm was achieved. Showed good surface finish with reduced chattering on the thin part

Case (NO.45)



SOLUTION

MFF

Ø100mm 2 flute



Machining Quality Improvement

Reduced Chattering and Good Finish

Vc = 1,080 sfm, Vf = 62.99 ipm (f = 0.059 ipt) D.O.C. = 0.004", Dry



Conventional

Competitor D

Ø100mm 8 flute (CBN)


Chattering occurred in thin wall

Vc = 3,940 sfm, Vf = 96.46 ipm (f = 0.025 ipt) D.O.C. = 0.004", Dry

Conventional cutter needed adjustment due to chattering on the thin portion. MFF prevented chattering. Finished surface is good and there is no gap in the tool path seams. Flatness of 5 μm achieved.

3 Adjustable Cutting Edge Height for Increased Usability

Cartridge height comes pre-adjusted and adjustment should not be necessary.
Adjustment is not required after replacing insert.

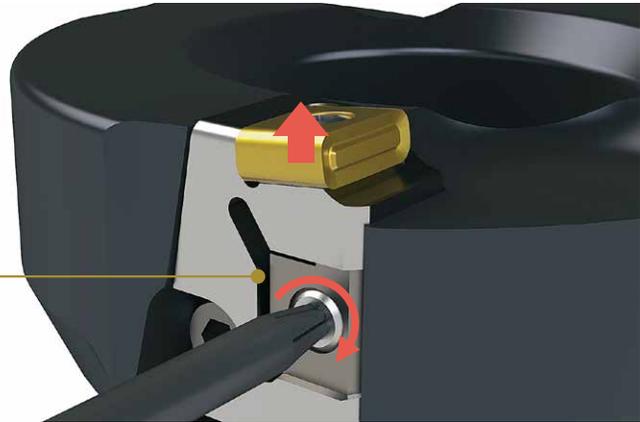

Included adjustment wrench

Easy-to-adjust Cutting Edge Height

Cutting edge height can be adjusted easily with one screw

Edge Adjustment

If D.O.C. is 0.004"~0.008" (0.1mm ~ 0.2mm), no adjustment is necessary (Pre-adjusted before holder is shipped).
Cutting edge adjustment is NOT required when replacing inserts.

If D.O.C. is less than 0.004" (0.1mm) or if you prefer a different edge height, use the following method:



Adjusting the Cutting Edge

Use the supplied TTW-15 wrench to rotate the screw and easily adjust the cutting edge position.

Procedure

To adjust, start with the screw turned counterclockwise about two rotations (lowering the cutting edge). Tighten the screw clockwise (raising the cutting edge) to adjust the amount of protrusion.

*Use a dial gauge to measure protrusion amount.

Precautions:

Make sure to lower the cutting edge below the desired height first (turning screw counterclockwise) and then raise the edge up to the final height (turning screw clockwise). If cutting edge is simply lowered to the final edge height, chattering or loosening of the screw may occur due to backlash. Make sure the measurement position of the cutting edge is the same machining diameter.

Standard Cutting Edge Height

D.O.C. = 0.0020" => protrusion against rough edge: 0.0012"


ap = 0.0039" ~ => protrusion against rough edge : 0.0024" *Pre-adjusted before shipment

Applicable Inserts

Shape	Part Number	Dimensions (mm)					MEGACOAT NANO Cermet	MEGACOAT NANO Carbide
		IC	S	D1	INSL	RE	PV60M	PR1525
 Steel and Stainless Steel (Low Cutting Force)	LNGX 120916R-TT	3/8	1/4	0.165	1/2	1/16	●	●
 Cast Iron	LNGX 120916	3/8	1/4	0.165	1/2	1/16	●	●

● : Standard Item

MFF

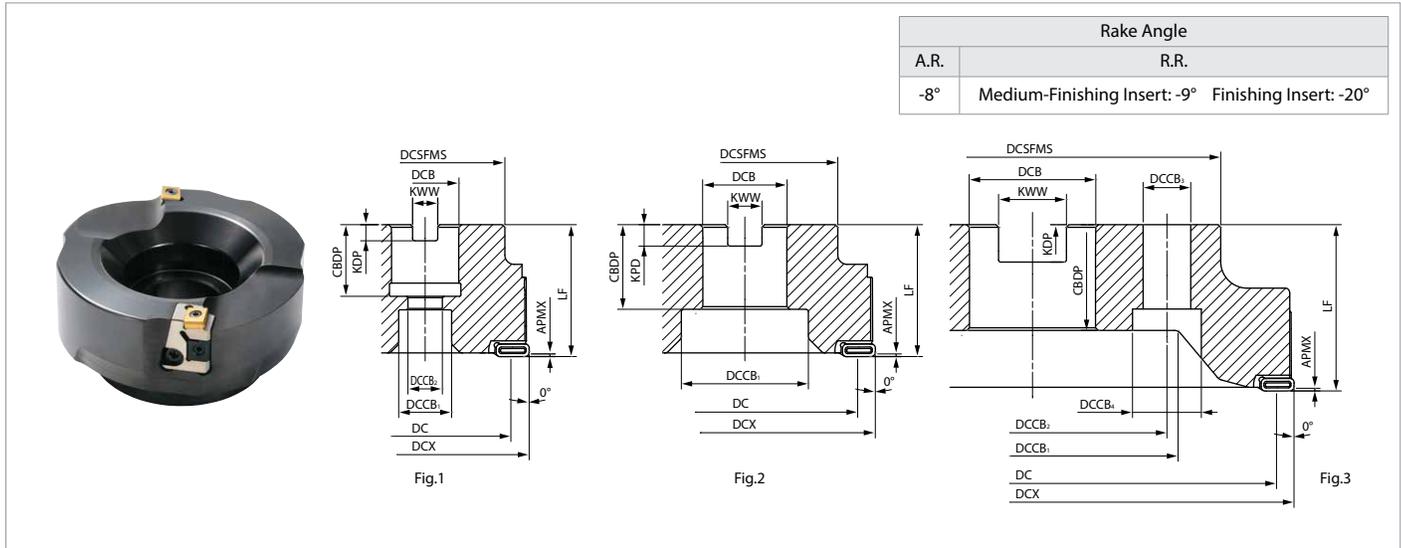

Toolholder Dimensions (Metric)


Part Number	Stock	No. of Inserts	Dimensions (mm)											Coolant Hole	Drawing	Weight (kg)	Max. RPM		
			DCX	DC	DCSFMS	DCB	DCCB ₁	DCCB ₂	DCCB ₃	DCCB ₄	LF	CBDP	KDP					KWW	APMX
Inch Bore Dia.	MFF 080R-SF	●	80	67.3	60	1.000"	20	13	-	-	50	1.063"	0.236"	0.375"	0.3	No	Fig.1	1.3	2,000
	100R-SF	●	100	87.3	70	1.250"	48	-	-	-	50	1.260"	0.315"	0.500"				Fig.2	1.8
	125R-SF	●	125	112.3	87	1.500"	58	-	-	-	63	1.496"	0.394"	0.625"			Fig.3		3.5
	160R-SF	●	160	147.3	102	2.000"	72	-	-	-	63	1.496"	0.433"	0.750"				5.9	1,000
	200R-SF	●	200	187.3	142	1.875"	110	101.6	26	18	63	1.575"	0.551"	1.000"			8.1	800	
	250R-SF	●	250	237.3	142	1.875"	110	101.6	26	18	63	1.575"	0.551"	1.000"			10.8*	800	
Metric Bore Dia.	MFF 080R-M-SF	●	80	67.3	60	27	20	13	-	-	50	24	7	12.4	0.3	No	Fig.1	1.3	2,000
	100R-M-SF	●	100	87.3	70	32	48	-	-	-	50	32	8	14.4				Fig.2	1.8
	125R-M-SF	●	125	112.3	87	40	55	-	-	-	63	33	9	16.4			Fig.3		3.5
	160R-M-SF	●	160	147.3	102	40	72	-	-	-	63	33	9	16.4				5.9	1,000
	200R-M-SF	●	200	187.3	142	60	110	101.6	26	18	63	40	14	25.7			7.7	800	
	250R-M-SF	●	250	237.3	142	60	110	101.6	26	18	63	40	14	25.7			10.5*	800	

*Ø250mm sizes have holes for lighter weight.

Caution with Max. Revolution

Set the number of revolutions per minute within the recommended cutting speed specified by the workpiece on back cover. Do not use the end mill or cutter at the maximum revolution or higher since the centrifugal force may cause chips and parts to scatter even under no load.

● : Standard Item

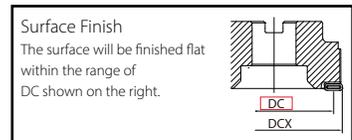

Spare Parts

Spare Parts							
Clamp Screw	Wrench	Wedge	Cartridge	Cartridge Clamp Screw	Wrench	Adjustment Screw	Anti-seize Compound
SB-3592TR	DTM-10	AD-MFF	CR-MFF	HH5X15L	TTW-15	W6X18N	P-37
Tightening Torque for Insert Screw 1.2 Nm							

Recommended Cutting Conditions ★ 1st recommendation ☆ 2nd recommendation

Chipbreaker	Workpiece	f (ipt)	D.O.C. (in)	Recommended Insert Grade (Cutting Speed Vc: sfm)	
				PV60M	PR1525
TT	Structural Steel	0.059 - 0.158 - 0.197	0.001 - 0.004 - 0.012	★ 750 - 920 - 1,150	☆ 750 - 920 - 1,150
	Carbon Steel	0.039 - 0.158 - 0.197		★ 660 - 820 - 1,150	☆ 660 - 820 - 1,150
	Alloy Steel	0.039 - 0.158 - 0.197		★ 660 - 820 - 1,150	☆ 660 - 820 - 1,150
	Mold Steel	0.039 - 0.079 - 0.158	0.001 - 0.004 - 0.008	☆ 390 - 660 - 820	★ 390 - 660 - 820
	Mold Steel (50 HRC~)	0.024 - 0.039 - 0.047	0.001 - 0.002 - 0.004	-	★ 160 - 230 - 260
	Austenitic Stainless Steel *	0.039 - 0.079 - 0.158	0.001 - 0.004 - 0.008	☆ 390 - 660 - 820	★ 390 - 660 - 820
	Martensitic Stainless steel *	0.039 - 0.118 - 0.158		☆ 490 - 660 - 980	★ 490 - 660 - 980
Standard	Gray Cast Iron	0.039 - 0.079 - 0.158	0.001 - 0.004 - 0.012	☆ 660 - 820 - 1,150	★ 660 - 820 - 1,150
	Nodular Cast Iron	0.059 - 0.079 - 0.158		☆ 490 - 820 - 980	★ 490 - 820 - 980

*Machining with coolant is recommended for stainless steel

The number in **bold** is recommended starting conditions. Adjust the cutting speed and the feed rate within the above conditions according to the actual machining situation.



Gain Excellent Surface Finish Results with the MFF



KYOCERA Precision Tools

102 Industrial Park Road
Hendersonville, NC 28792
Customer Service | 800.823.7284 - Option 1
Technical Support | 800.823.7284 - Option 2



Official Website | www.kyoceraprecisiontools.com
Distributor Website | mykpti.kyocera.com
Email | cuttingtools@kyocerapti.com